


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 22 TOWNSHIP 17 RANGE 4  
DATE: 10-21-08  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Re-set Harrison  
METHOD OF ESTABLISHMENT: County: 9-26-04

IN. S.P.C. E ZONE NAD '83  
NAME: 17042201  
N: 517871.7716(m)  
E: 65543.3455(m)

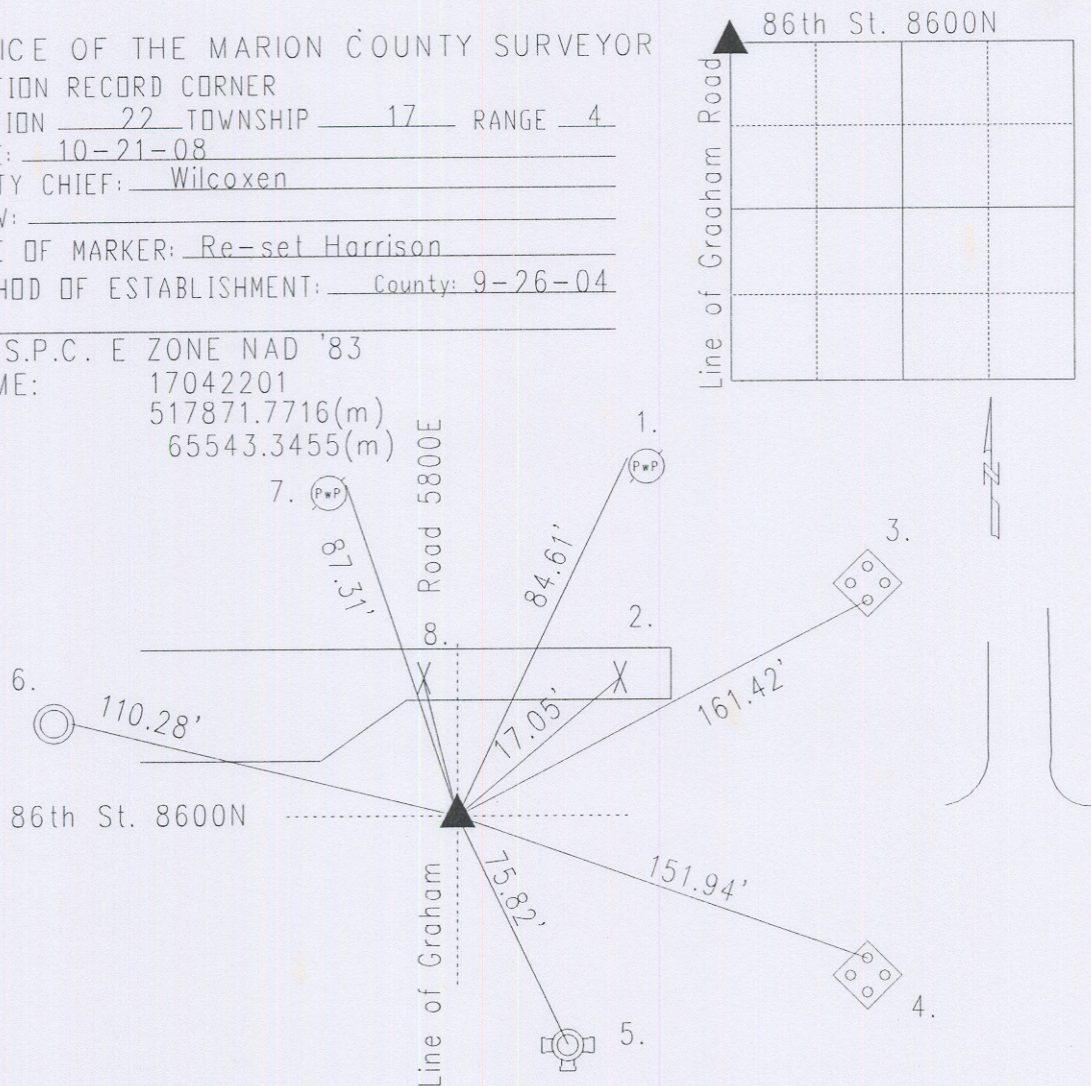

CORNER HISTORY: Original post set 1821 by Wm. B. Laughlin with witness: 7" beech N 16 W 6 links; 8" beech S 1 W 9 links per Marion County Atlas pg. 12. D.B. Hosbrook dated 5-24 & 5-25-1855 called witness: 16" beech N 50 1/2 E 79 links, 72" oak S 48 W 52 2/3 links per Lawrence Township Legal Survey Book pg. 58. Survey by julian 10-1893 for Section 16 & 21-17-4 called for stone per Washington Township Legal Survey Book pg. 11. Paul julian 6-29-1894 for 16-17-4 called stone. 1-18-79 established by Scherschel called railroad spike. Excavated 9-25-86 and PK by Scherschel fd at surface. No stone. Harrison set. Re-tied 10-4-99 by Kiste. Re-tied 9-26-04 by Wilcoxon. Re-tied 10-21-08 by Wilcoxon. 17042201

REF.	DISTANCE	DESCRIPTION
1.	84.61'	PK nail W PwP#35-215A 40"up
2.	17.05'	Cut 'x' in median
3.	161.42'	Cut 'x' S bolt of signal post base
4.	151.94'	Cut 'x' N bolt of signal post base
5.	75.82'	Top nut of fire hydrant
6.	110.28'	Cut 'x' F-rim of sewer manhole
7.	87.31'	Mag nail w/bw F PwP#127-215A 12"up
8.	6.12'	Cut 'x' in median